


MB08U2

二段力液压铰链 (固装)
Series hydraulic soft-close hinges
(invisible)



产品描述

Product Description

开启角度: 110 度
门可选用板厚度: 14-26 毫米
面板尺寸 (K): 3-7 毫米
铰杯高度: 11.3 毫米
铰杯直径: 35 毫米
铰杯两孔距离: 48 毫米

Open degree: 110°
Range of doors thickness: 14-26mm
Height of hinge cup: 11.3mm
Diameter of hinge cup: 35mm
Diameter of door (K): 3-7mm
Distance of two hole center: 48mm

应用实例


Applied Instance

H= 安装板高度
K= 门板外线与铰链杯钻孔距离
D= 侧板上所需盖位
A= 门与侧板的间隙
L= 面板内线侧边外线距离

H=height of mounting plate
K=drilling distance from the edge of door
to the edge of the hole
D=required door overlay
A=gap between door and side panel
L=gap between door and carcase

安装尺寸

Installation Dimension

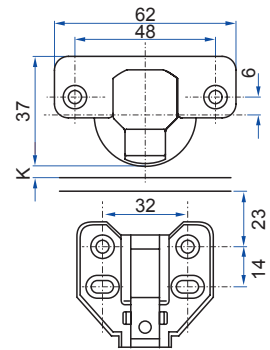

型号对照 Model Comparison

订货号: MB08U209		底板高度 H mm	铰杯距离 K mm	盖位 D mm	铰链底座高度 H=14+K-D		
直臂 Full overlay (全盖门)		3	4	5	6	7	
		盖位 D mm					
中曲 Half overlay (半盖门)		0	17	18	10	20	21
		2	15	16	17	18	19
大曲 Insert (内嵌门)	底板高度 H mm	3	4	5	6	7	
		盖位 D mm					
直臂 Full overlay (全盖门)	铰杯距离 K mm	0	8	9	10	11	12
		2	6	7	8	9	10
中曲 Half overlay (半盖门)	盖位 D mm	0	-1	-2	-3	-4	-5
		2	1	0	-1	-2	-3
大曲 Insert (内嵌门)	铰链底座高度 H=-2+K-A						